

Section 9 JAMB WEATHERSTRIP

Standard Sizes 30", 32", 36", 60", 72", 80", 84". Aluminum weatherstrip is cut **1/4" over**.

Other lengths are available and cut exact (Extra cost over 84").

Standard Sets: 32" x 80", 36" x 80", 72" x 80", 32" x 84", 36" x 84",

and 72" x 84". **Jamb-type weatherstrip may be ordered in three piece sets or individual lengths.**



Above specifications do not apply to part # **3218**. (Only **36" x 80"** sets available).

Fasteners holes are slotted for close adjustment in most styles. #6 phillips, stainless steel sheet metal screws are provided with these products.


Self drilling sheet metal screws are available at extra cost.

JAMB-TYPE WEATHERSTRIP

NOTE:
Santoprene® bulb seal (black) is available as an option for vinyl on parts **1000 & 3212**.
Special requirements on the job may call for this advanced seal.
Some problems regarding a sticking reaction between certain paints and vinyl have been eliminated with the use of Santoprene®.

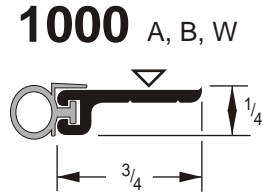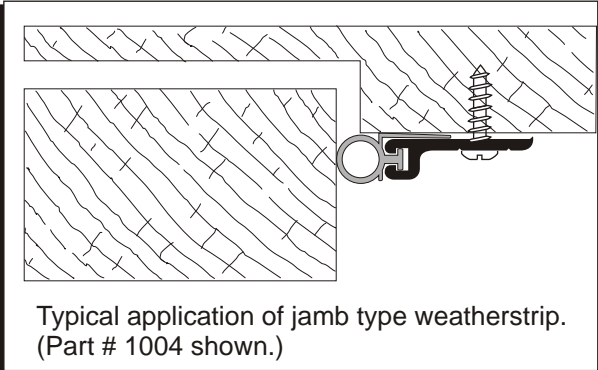


Jamb-type weatherstrip, notched corners for continuous appearance. Extruded aluminum carrier with black, gold, or white vinyl bulb seal. Slotted holes for ease in adjustment. #6 x 5/8" SMS provided.

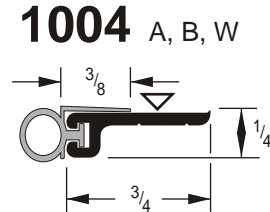


Part 1004 is identical to part 1000 except for the design of the vinyl bulb (Black only).

California Energy Commission Approved.

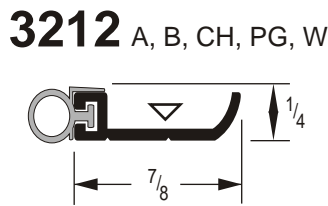

Jamb-type weatherstrip, with black, gold, or white vinyl bulb seal, slotted holes. #6 x 5/8" SMS provided.

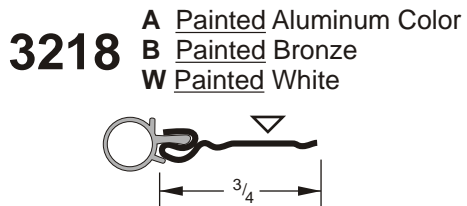

Roll formed aluminum with vinyl bulb seal, slotted holes for ease in adjustment. #6 x 5/8" SMS are provided. **Only 36" x 80" sets available.**

▽ Indicates location of standard fastener hole.

FOAM WEATHERSTRIP

*** LIFETIME WARRANTY *** offered by Schlegel & Loxcreen


1750

Box Qty.

| | | | |
|--------------|-----|-------|-----|
| 1750B | 82" | Brown | 150 |
| 1750W | 82" | White | 150 |
| 1751B | 97" | Brown | 125 |
| 1751W | 97" | White | 125 |

Tolerance +/- 1"

(Sold by full box or by piece, broken box premium applies).

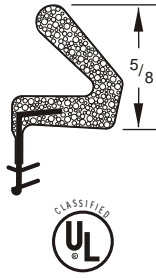

SCHLEGEL QEBD 650 Q-LON® KERF TYPE DOOR SEAL.

Fire rated by Underwriters Laboratory for 90 minutes.

Inserts easily to seal the strike side, hinge side and header.

A Q-LON® Door seal made of an open-cell urethane foam core and clad in an embossed polyethylene, U.V. stabilized paint-resistant liner for kerf applications.

QEBD 650 contains no plasticizers to cause deterioration over time.

Has 5/8" reach. Resilient reach characteristics conform seal to warped doors. Width of barb - 5/32" (.155")

Requires 1/8" x 7/16" kerf in stop. (If rabbeted jamb is used, allow for depth of 2-1/8". If applied stop is used, adjust for compression of seal.)

Passed water penetration tests at 25 mph and 34 mph ASTM E-331 std. Test.


1783

Box Qty.

| | | | |
|--------------|------|----------|-----|
| 1783B | 82" | Brown | 150 |
| 1783W | 82" | White | 150 |
| 1784B | 97" | Brown | 125 |
| 1784W | 97" | White | 125 |
| 1785B | 120" | Brown | 125 |
| 1785W | 120" | White | 125 |
| 1786D | 500' | RL Black | |
| 1786B | 500' | RL Brown | |
| 1786W | 500' | RL White | |

Tolerance +/- 1"

(Sold by full box or by piece, broken box premium applies).

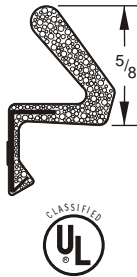

SCHLEGEL QDS 650 Q-LON® KERF TYPE DOOR SEAL.

Fire rated by Underwriters Laboratory for 90 minutes in accordance with UL QVWZ file #R14384.

Cellular modified foam core, cladding is an embossed, non-vinyl, U.V. stabilized, paint-resistant liner. Has 5/8" reach. Will allow for as much as 3/16" movement with no loss of sealing performance.

Air infiltration tested within ASTM, NWWDA, ANSI and ISDSI standard.

Requires 1/8" x 3/8" kerf in stop. (If rabbeted jamb is used, allow for depth of 2-1/8". If applied stop is used, adjust for compression of seal.)


1787

Box Qty.

| | | | |
|--------------|-----|-------|-----|
| 1787B | 97" | Brown | 100 |
| 1787W | 97" | White | 100 |

Tolerance +/- 1"

(Sold by full box or by piece, broken box premium applies).

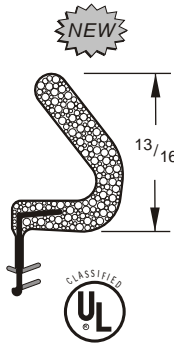

SCHLEGEL QEBD 825 Q-LON® KERF TYPE DOOR SEAL. EXTENDED REACH.

Fire rated by Underwriters Laboratory for 90 minutes.

Inserts easily to seal the strike side, hinge side and header.

A Q-LON® Door seal made of an open-cell urethane foam core and clad in an embossed polyethylene, U.V. stabilized paint-resistant liner for kerf applications.

QEBD 825 contains no plasticizers to cause deterioration over time.

Has 13/16" reach. Resilient reach characteristics conform seal to warped doors. Width of barb - 5/32" (.155")

Requires 1/8" x 7/16" kerf in stop.


1788

Box Qty.

| | | | |
|--------------|-----|-------|-----|
| 1788B | 97" | Brown | 100 |
| 1788W | 97" | White | 100 |

Tolerance +/- 1"

(Sold by full box or by piece, broken box premium applies).

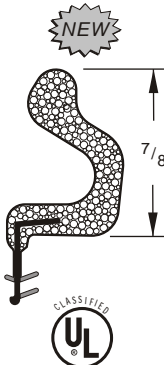

SCHLEGEL QEBD 875 Q-LON® KERF TYPE DOOR SEAL. EXTENDED REACH.

Fire rated by Underwriters Laboratory for 20 minutes.

Inserts easily to seal the strike side, hinge side and header.

A Q-LON® Door seal made of an open-cell urethane foam core and clad in an embossed polyethylene, U.V. stabilized paint-resistant liner for kerf applications.

QEBD 875 contains no plasticizers to cause deterioration over time.

Has 7/8" reach. Resilient reach characteristics conform seal to warped doors. Width of barb - 5/32" (.155")

Requires 1/8" x 7/16" kerf in stop.


*** LIFETIME WARRANTY *** offered by Schlegel & Loxcreen

1810

| | Box Qty. |
|------------------------|----------|
| 1810B 82" Brown | 125 |
| 1810W 82" White | 125 |
| 1811B 96" Brown | 125 |
| 1811W 96" White | 125 |

Tolerance +/- 1"

(Sold by full box or by piece, broken box premium applies).



SCHLEGEL QEBD 500 Q-LON® KERF TYPE DOOR SEAL.

Fire rated by Underwriter Laboratory for 180 minutes in accordance with UL QVWZ file #R14384.

Cellular modified foam core, cladding is an embossed, non-vinyl, U.V. stabilized, paint-resistant liner. Has 1/2" reach. Will allow for as much as 3/16" movement with no loss of sealing performance.


Cellular core stays soft at low temperatures. Contains no plasticizers to cause deterioration over time.

Air infiltration certified by Pittsburgh Testing Laboratories to as low as .01 cfm/fcp; well within ASTM, NWWDA, ANSI and ISDSI standards. **Requires 1/8" x 3/8" kerf in stop. (If rabbeted jamb is used, allow for depth of 1-15/16". If applied stop is used, adjust for compression of seal.)**

1950

| | Box Qty. |
|-------------------------|----------|
| 1950B 81" Brown | 125 |
| 1950W 81" White | 125 |
| 1951B 97" Brown | 125 |
| 1951W 97" White | 125 |
| 1952B 120" Brown | 75 |
| 1952W 120" White | 75 |

Tolerance +/- 1"



LOXSCREEN 9650 LOXSEAL® HIGH PERFORMANCE WEATHERSTRIP

Fire rated by Warnock Hersey, Inc. for 90 minutes (per ASTM E-152).

Inserts easily to seal the strike side, hinge side, and header.


LoxSeal® weatherstrip made of polyethylene clad urethane foam.

Requires 1/8" X 7/16" kerf in stop.

Passed air infiltration test at 25 mph (per ASTM E-283).

Passed water penetration resistance (per ASTM E-331).

Typical installation for:
1750, 1783, 1787, 1788, 1810 and 1950.

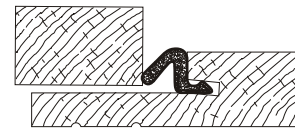

1820

| | Box Qty. |
|------------------------|----------|
| 1820B 86" Brown | 150 |
| 1820W 86" White | 150 |

Tolerance +/- 1"

(Sold by full box or by piece, broken box premium applies).



SCHLEGEL QFS 375 Q-LON® ADHESIVE BACKED DOOR SEAL.


Fire rated by Underwriters Laboratory for 180 minutes. In accordance with UL QVWZ file #14384.

Char foam core, cladding is a tough paint-resistant polyethylene liner, UV stabilized.

Has 3/8" reach. Will allow for as much as 1/4" movement with no loss of sealing performance.

Compression set less than 1% from 0 degrees F. To 78 degrees F.

Stop width required: 1/2" (If rabbeted jamb is used, allow for depth of 1-7/8" or 1-15/16". If applied stop is used, adjust for compression of seal.)

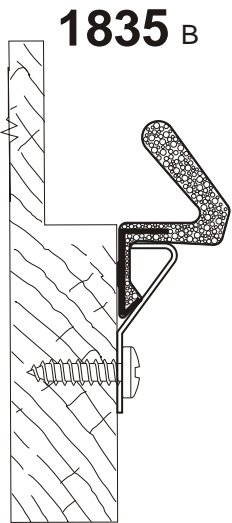


1835 B
SCHLEGEL QDS 650 Q-LON® DOOR SEAL REPLACEMENT KIT (37" X 85")
 The seal is original Q-Lon® seal permanently bonded to a metal carrier.

Self-Adjusting The seal is mounted to a pre-painted and galvanized no-rust steel carrier. The seal is soft and flexible with a reach of 11/16" when installed. The Q-Lon® replacement door seal will self-adjust up to 3/8" to accommodate door movement or out-of square installations. In addition, it is manually adjustable, as slotted holes in the carrier allow up to 5/16" of additional adjustment.

1825

1825D Black
1825W White

Corner seal - Adhesive backed, pile corner seal with fin seal by Schlegel. Effective against water infiltration.

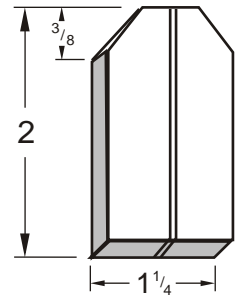


NOT TO SCALE

1826 B, W

Compression Corner Seal -


by Schlegel for installation on strike jamb and hinge jamb sill corners.



ADHESIVE BACKED DOOR SEAL

1143


1143B Black 84"



Schlegel PF-114 "A minimum clearance seal" with pressure sensitive adhesive for use as compression or wipe seal on metal or wood frames. **"Limited to stock on hand"** Call for availability.

1830

515 ft. rolls:
1830B Brown
1830D Black
1830W White



17 ft. packages:
1430B Brown
1430D Black
1430W White

SANTOPRENE® RUBBER

For use with either 1/2" or 5/8" stop. Adhesive backed, extruded Santoprene® rubber, an advanced elastomeric product from Monsanto. Provides outstanding engineering properties in UV stability and flame retardance. Service temperature from -81 to +275 degrees F.

WEATHERFLEX SEAL

1050

1050K White 96"



Schlegel PF-109 for kerf application. Requires a 5/64" x 9/32" kerf.

1052

1052K Tan 96"



Weatherflex seal for kerf application. Requires a 1/16" x 5/16" kerf.

1053

1053K Tan 84"
1056K Clear 84"



Weatherflex seal for kerf application. Requires a 1/8" x 5/16" kerf.

WOODSTOP GASKETING AND SOUND SEALS

Installs into saw kerf in applied wood stops or center kerfed mortised jambs.

9020



Vinyl bulb
 3/8" dia.
 500' / roll
 Color: Gray
 Kerf: 1/8" x 5/16"

9021



Schlegel AP-412 Aptus® TPE bulb 5/16" dia. dual durometer with slipcoat bulb surface. 1000' / roll
 Color: Beige
 Kerf: 5/64" x 5/16"

9024



Vinyl bulb
 1/4" dia.
 600' / roll
 Colors: Black, Gray and White
 Kerf: 1/8" x 5/16"

9022



Vinyl three finger
 1/2" wide
 500' / roll
 Color: Gray
 Kerf: 1/8" x 5/16"

9023



Vinyl three finger
 5/16" wide
 500' / roll
 Color: Gray
 Kerf: 1/8" x 5/16"