

Section 9 JAMB WEATHERSTRIP

Standard Sizes 30", 32", 36", 60", 72", 80", 84". Aluminum weatherstrip is cut 1/4" over.

Other lengths are available and cut exact (Extra cost over 84").

Standard Sets: 32" x 80", 36" x 80", 72" x 80", 32" x 84", 36" x 84",

and 72" x 84". Jamb-type weatherstrip may be ordered in three piece sets or individual lengths.

Fasteners holes are slotted for close adjustment in most styles. #6 phillips, stainless steel sheet metal screws are provided with these products.

Self drilling sheet metal screws are available at extra cost.


JAMB-TYPE WEATHERSTRIP

NOTE:


Santoprene® bulb seal (black) is available as an option for vinyl on parts 1000 & 3212.

Special requirements on the job may call for this advanced seal.

Some problems regarding a sticking reaction between certain paints and vinyl have been eliminated with the use of Santoprene®.

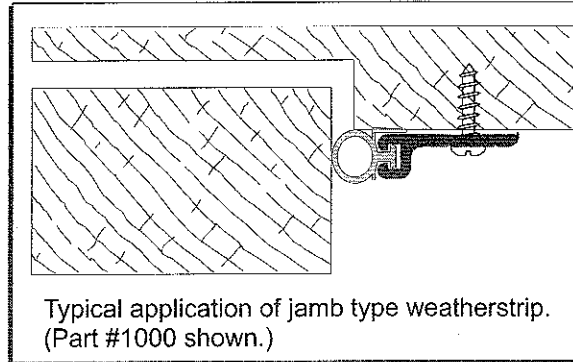


1000 A, B, PG, W



Jamb-type weatherstrip, notched corners for continuous appearance. Extruded aluminum carrier with black vinyl bulb seal. Slotted holes for ease in adjustment. #6 X 5/8" SMS provided.

3212 A, B, W



Jamb-type weatherstrip, with black vinyl bulb seal, slotted holes. #6 X 5/8" SMS provided.


▽ Indicates location of standard fastener hole.

FOAM WEATHERSTRIP

1750

Box Qty.

1750B	82"	Brown	150
1750D	82"	Black	150
1750W	82"	White	150
1751B	97"	Brown	125
1751D	97"	Black	125
1751W	97"	White	125



SCHLEGEL QEBD 650 Q-LON® KERF TYPE DOOR SEAL.

Fire rated by Underwriters Laboratory for 90 minutes.

Inserts easily to seal the strike side, hinge side and header.

A Q-LON® Door seal made of an open-cell urethane foam core and clad in an embossed polyethylene, U.V. stabilized paint-resistant liner for kerf applications.

QEBD 650 contains no plasticizers to cause deterioration over time.

Has 5/8" reach. Resilient reach characteristics conform seal to warped doors. Width of barb - 5/32" (.155")

Requires 1/8" x 7/16" kerf in stop. (If rabbeted jamb is used, allow for depth of 2-1/8". If applied stop is used, adjust for compression of seal.)

Passed water penetration tests at 25 mph and 34 mph ASTM E-331 std. Test.

Tolerance +/- 1"

(Sold by full box or by piece, broken box premium applies).

PRODUCTS ARE SHOWN ACTUAL SIZE
(EXCEPT AS NOTED)

COMBO ALUMINUM PRODUCTS, EL CAJON, CA
Tel (619) 447-9200 (800) 457-7500 Fax (619) 442-4558


1783

Box Qty.

1783B	82"	Brown	150
1783W	82"	White	150
1784B	97"	Brown	125
1784W	97"	White	125
1785B	120"	Brown	125
1785W	120"	White	125
1786D	500'	RL Black	
1786B	500'	RL Brown	
1786W	500'	RL White	

Tolerance +/- 1"

(Sold by full box or by piece, broken box premium applies).



SCHLEGEL QDS 650 Q-LON® KERF TYPE DOOR SEAL.

Fire rated by Underwriters Laboratory for 90 minutes in accordance with UL QVWZ file #R14384.

Cellular modified foam core, cladding is an embossed, non-vinyl, U.V. stabilized, paint-resistant liner. Has 5/8" reach. Will allow for as much as 3/16" movement with no loss of sealing performance.

Air infiltration tested within ASTM, NWWDA, ANSI and ISDSI standard.

Requires 1/8" x 3/8" kerf in stop. (If rabbeted jamb is used, allow for depth of 2-1/8". If applied stop is used, adjust for compression of seal.)


1787

Box Qty.

1787B	97"	Brown	100
1787D	97"	Black	100
1787W	97"	White	100

Tolerance +/- 1"

(Sold by full box or by piece, broken box premium applies).



SCHLEGEL QEBD 825 Q-LON® KERF TYPE DOOR SEAL. EXTENDED REACH.

Fire rated by Underwriters Laboratory for 90 minutes.

Inserts easily to seal the strike side, hinge side and header.

A Q-LON® Door seal made of an open-cell urethane foam core and clad in an embossed polyethylene, U.V. stabilized paint-resistant liner for kerf applications.

QEBD 825 contains no plasticizers to cause deterioration over time.

Has 13/16" reach. Resilient reach characteristics conform seal to warped doors. Width of barb - 5/32" (.155")

Requires 1/8" x 7/16" kerf in stop.


1788

Box Qty.

1788B	97"	Brown	125
1788W	97"	White	125

Tolerance +/- 1"

(Sold by full box or by piece, broken box premium applies).



SCHLEGEL QEBD 875 Q-LON® KERF TYPE DOOR SEAL. EXTENDED REACH.

Fire rated by Underwriters Laboratory for 20 minutes.

Inserts easily to seal the strike side, hinge side and header.

A Q-LON® Door seal made of an open-cell urethane foam core and clad in an embossed polyethylene, U.V. stabilized paint-resistant liner for kerf applications.

QEBD 875 contains no plasticizers to cause deterioration over time.

Has 7/8" reach. Resilient reach characteristics conform seal to warped doors. Width of barb - 5/32" (.155")

Requires 1/8" x 7/16" kerf in stop.


1810

Box Qty.

1810B	82"	Brown	175
1810W	82"	White	175
1811B	96"	Brown	150
1811W	96"	White	150

Tolerance +/- 1"

(Sold by full box or by piece, broken box premium applies).



SCHLEGEL QEBD 500 Q-LON® KERF TYPE DOOR SEAL.

Fire rated by Underwriter Laboratory for 180 minutes in accordance with UL QVWZ file #R14384.

Cellular modified foam core, cladding is an embossed, non-vinyl, U.V. stabilized, paint-resistant liner. Has 1/2" reach. Will allow for as much as 3/16" movement with no loss of sealing performance.


Cellular core stays soft at low temperatures. Contains no plasticizers to cause deterioration over time.

Air infiltration certified by Pittsburgh Testing Laboratories to as low as .01 cfm/fcp; well within ASTM, NWWDA, ANSI and ISDSI standards. **Requires 1/8" x 3/8" kerf in stop. (If rabbeted jamb is used, allow for depth of 1-15/16". If applied stop is used, adjust for compression of seal.)**

1950

		Box Qty.
1950B	81" Brown	125
1950W	81" White	125
1951B	97" Brown	125
1951W	97" White	125
1952B	120" Brown	75
1952W	120" White	75

Tolerance +/- 1"



LOXCREEN 9650 LOXSEAL® HIGH PERFORMANCE WEATHERSTRIP
 Fire rated by Warnock Hersey, Inc. for 90 minutes (per ASTM E-152).
Inserts easily to seal the strike side, hinge side, and header.
 LoxSeal® weatherstrip made of polyethylene clad urethane foam.
Requires 1/8" X 7/16" kerf in stop.
 Passed air infiltration test at 25 mph (per ASTM E-283).
 Passed water penetration resistance (per ASTM E-331).

Typical installation for:
 1750, 1783, 1787, 1788, 1810 and 1950.

1820

		Box Qty.
1820B	86" Brown	150
1820W	86" White	150


Tolerance +/- 1"



SCHLEGEL QFS 375 Q-LON® ADHESIVE BACKED DOOR SEAL.
 Fire rated by Underwriters Laboratory for 180 minutes. In accordance with UL QVWZ file #14384.
 Char foam core, cladding is a tough paint-resistant polyethylene liner, UV stabilized.
 Has 3/8" reach. Will allow for as much as 1/4" movement with no loss of sealing performance.
 Compression set less than 1% from 0 degrees F. To 78 degrees F.
Stop width required: 1/2" (If rabbeted jamb is used, allow for depth of 1-7/8" or 1-15/16". If applied stop is used, adjust for compression of seal.)

(Sold by full box or by piece, broken box premium applies).

1835 B, W

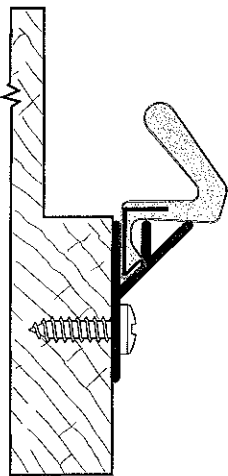

SCHLEGEL QDS 650 Q-LON® AND ALUMINUM EXTRUSION JAMB SEAL (36" X 84")

Features:
 Genuine Schlegel QDS 650 Q-Lon® inserted into an aluminum extrusion.

Q-Lon can be replaced without removing holder from the jamb.


Slotted mounting holes allow for easy adjustment.

Color-matched mounting screws provided.

1825

1825D Black

Corner seal -
 Adhesive backed, pile corner seal with fin seal by Schlegel. Effective against water infiltration.



NOT TO SCALE

1826 B, W

Compression Corner Seal -

by Schlegel for installation on strike jamb and hinge jamb sill corners.



ADHESIVE BACKED DOOR SEAL

1830


500 ft. rolls:

1830D	Black
1830W	White

17 ft. packages:

1430D	Black
1430W	White

SANTOPRENE® RUBBER
 For use with either 1/2" or 5/8" stop. Adhesive backed, extruded Santoprene® rubber, an advanced product from Monsanto. Provides outstanding engineering properties in UV stability and flame retardance. Service temperature from -81 to +275 degrees F.



WOODSTOP GASKETING AND SOUND SEALS

Installs into saw kerf in applied wood stops or center kerfed mortised jambs.

9021

Schlegel AP-412 Aptus® TPE
 bulb 5/16" dia. dual durometer with slipcoat bulb surface. 1000' / roll
 Color: Beige
 Kerf: 5/64" x 5/16"



9024

Vinyl bulb 1/4" dia. 600' / roll
 Colors: Black and White
 Kerf: 1/8" x 5/16"



9023

Vinyl three finger 5/16" wide 500' / roll
 Color: Gray
 Kerf: 1/8" x 5/16".

